ЗАКАЗАТЬ: CI2-A1 сенсор хлора 0-20 ppm

CL2-A1/CL2-A1+ Chlorine Sensor

The CL2-A1 sensor is a PPM sensor that is designed for a broad variety of applications and instrumentation including portable gas detectors and fixed gas detection systems for industrial safety, environmental air quality, combustion analysis and process control. The A series is the most widely used sensor format for portable gas detection applications. It is available in our standard format (CL2-A1) and with our patented Integrated Smart Technology (CL2-A1+) that has an IST board with a memory chip and temperature sensor integrated in the sensor. The + sensors store specific calibration, specification, and identification data on every sensor allowing plug and play operation. The on-board temperature sensor improves the accuracy and simplicity of temperature compensation algorithms.

CL2-A1 Chlorine Sensor – 3-Electrode

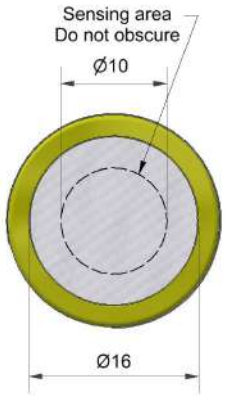

Top View

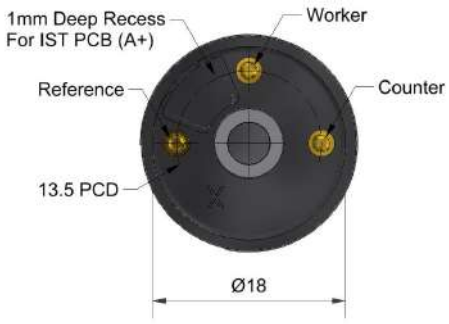

Bottom View

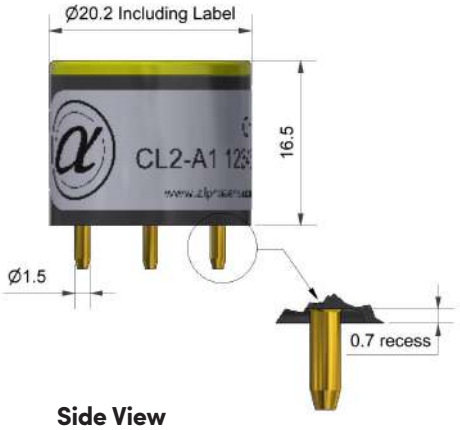

Side View

CL2-A1 Chlorine Sensor – 3-Electrode (with Integrated Smart Technology)

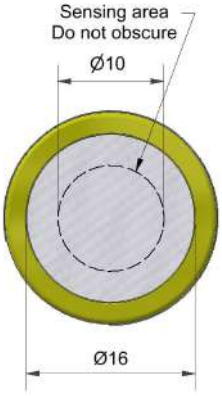

Top View

Bottom View



IST Board

Side View

Dimensions are in millimetres (± 0.15 mm).

Sensor Data

Performance	Sensitivity	nA/ppm in 10ppm Cl_2		-350 to -750
	Response time	t_{90} (s) from zero to 10ppm Cl_2 (33Ω load resistor) ppm		< 60
	Zero current (typical)	equivalent in zero air		± 0.4
	Resolution	RMS noise (ppm equivalent, 33Ω load resistor)		< 0.02
	Range	ppm limit of performance warranty		20
	Linearity	ppm error at full scale, linear at zero and 5ppm Cl_2		± 1.5
	Overgas limit	maximum ppm for stable response to gas pulse		50
Lifetime	Zero drift	ppm equivalent change/year in lab air, monthly test		< 0.05
	Sensitivity drift	% change/year in lab air, monthly test		< 10
	Operating life	months until 80% original signal (24-month warranted)		> 24
Environmental	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 10ppm Cl_2		65 to 85
	Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 10ppm Cl_2		105 to 125
	Zero @ -20°C	ppm equivalent change from 20°C		<± 0.2
	Zero @ 50°C	ppm equivalent change from 20°C		< 0 to -0.8
Cross Sensitivity	H_2S sensitivity	% measured gas @ 20ppm	H_2S	< -300
	NO_2 sensitivity	% measured gas @ 10ppm	NO_2	100
	NO sensitivity	% measured gas @ 50ppm	NO	< 3
	SO_2 sensitivity	% measured gas @ 20ppm	SO_2	< -8
	CO sensitivity	% measured gas @ 400ppm	CO	< 0.1
	H_2 sensitivity	% measured gas @ 400ppm	H_2	< 0.1
	C_2H_4 sensitivity	% measured gas @ 400ppm	C_2H_4	< 0.1
Key Specifications	Temperature range	°C		-20 to 50
	Pressure range	kPa		80 to 120
	Humidity range	%rh continuous		15 to 90
	Storage period	months @ 3 to 20°C (stored in sealed pot)		6
	Load resistor	Ω (for optimum performance)		33
	Weight	g		< 6

Figure 1 Sensitivity Temperature Dependence

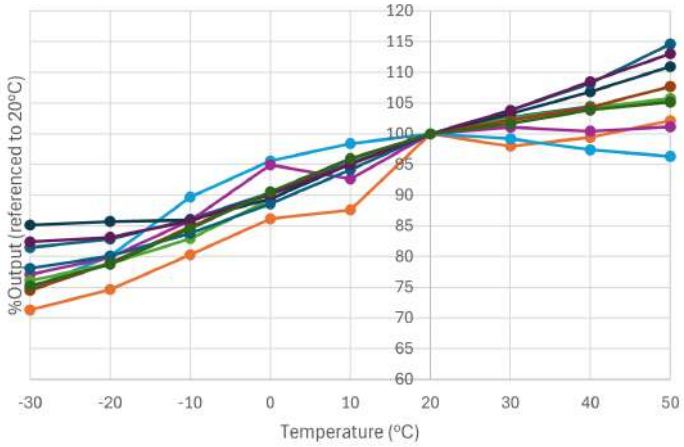

Figure 1 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors. The mean and 95% confidence intervals are shown.

Chlorine gas tests are difficult, especially at higher temperatures.

Figure 2 Zero Temperature Dependence

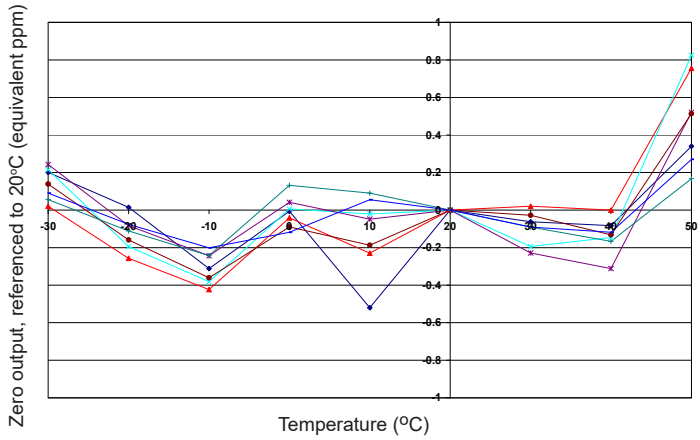

Figure 2 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent, referenced to zero at 20°C.

This data is taken from a typical batch of sensors.

Figure 3 Response to 10ppm Cl_2 changes with temperature

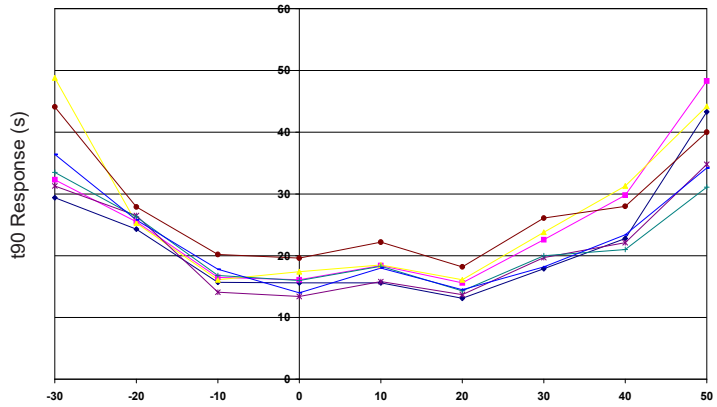

Figure 3 shows the response time temperature dependence for a typical batch of sensors.

Normally the response time increases as the temperature decreases, but for chlorine it also increases at higher temperatures, reflecting the complex chemistry.

IST Board Data

Interface	Communication Bus	Compatible with the 400 kHz I²C protocol
	Max. Bus Speed	Up to 1 MHz
	Input Logic Levels	High (Recessive) < 2.3 V | Low (Dominant) < 0.2 V
	Absolute Max. Input Signal	3.6 V
Electrical	Supply Voltage Range	1.7 V to 3.6 V
	Supply current – Stand-By	< 5 µA
	Supply current – Operating	< 0.15 mA (temperature reading only) < 2.15 mA (temperature reading + memory reading/writing)
	Power Supply Conditioning	Built-In 100 nF decoupling capacitor
	ESD Protection	4 kV (human body model) - Enhanced ESD / Latch-Up protection
	Bus Pins Input Capacitance	15 pF max.
Performance	Operational Temperature	–40 °C to +85 °C
	Temperature Sensor Accuracy	±1°C (-0°C to +70°C)
	Memory Data Retention	> 200 years
	Memory Write Cycles	> 4,000,000
Data & Communication	Memory IC & I2C Address	M24128X-FCU | Device Address: R - 0xA0 / W – 0xA1
	Temperature IC & I2C Address	MAX31875R0TZS+T | Device Address: R - 0x90 / W – 0x91
	Product Data Start Address	0x0900
	Calibration Data Start Address	0x0B00
	User Data Area	0x0D00 – 0x18FF (3,072 Bytes)
	CRC Polynomial	0x 01 04C1 1DB7
	Digital Signature Algorithm	SHA-256

Factory-populated data

Product Data
- Data Format Version
- Customer (OEM) ID
- Product ID
- Type of Sensor / Target Gas
- Sensor Serial Number
- End of Storage Period Date
- Sensor Replacement Date
- Product Data Checksum
- Alphasense Digital Signature
- Customer Digital Signature

Calibration
- Calibration Data Units
- Zero (clean dry air) Output
- Calibration Span
- Calibration Output
- Sensitivity
- Calibration Date
- Calibration Data Checksum
- Calibration Data Signature

Sensor Specification
- Over-gas limit
- Concentration Range
- Temperature Range Low
- Temperature Range High
- Humidity Range Low
- Humidity Range High
- Pressure Range Low
- Pressure Range High
- Specification Checksum

15,000+ locations

Customer Specific
- Custom Parameters
- Re-Calibration Due Date
- Operational Limits:
- Low | High | STEL | TWA
- Next Bump Test Due Date
- User Data Area

Note: Above 85% rh and 40°C a maximum continuous exposure period of 10 days is warranted. Where such exposure occurs the sensor will recover normal electrolyte volumes when allowed to rest at lower % rh and temperature levels for several days.

At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions. NOTE: all sensors are tested at ambient environmental conditions unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within.(©ALPHASENSE LTD) Doc. Ref. CL2-A1/MAY 26

ЗАКАЗАТЬ: CI2-A1 сенсор хлора 0-20 ppm